


LED Striped Light Bars

24V DC 3000K CRI 85 Series



CLEANLIFE® LED

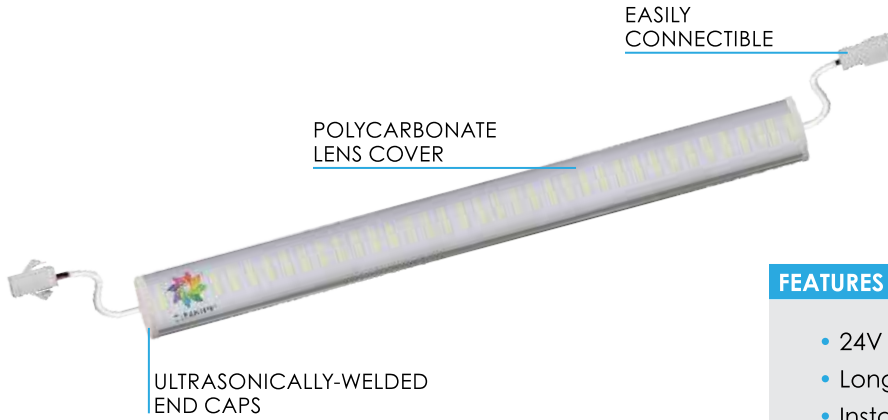

CLEANLIFE® LED Light Bars are a one-of-a-kind lighting solution for backlit mirrors, signs, retail displays, decorative, under cabinet and cove lighting.

FEATURES

- 24V Constant Current Design
- Long Lifetime, L70>50,000 Hours
- Instant On, No Flicker, Mercury Free, No UV
- High Efficacy, Up to 100 LPW
- Glare Free, Polycarbonate Lens Cover
- Glass free for safer working conditions
- Available in all standard T5 lengths as well as custom lengths, No MOQ Required
- Daisy Chains with Quick Connectors
- Operating Temperature from -13°F to +122°F
- Exceptional Color Accuracy, CRI 85
- CRI 95 and 2700K available for custom orders
- 7-Year Manufacturer's Limited Warranty
- UL Recognized Component, CE and RoHS Compliant



7-Year Limited Warranty

*Dimmable with compatible 24V constant voltage dimmable LED drivers only. Speak to a CLEANLIFE® representative for more information.

APPLICATION INFORMATION

Applications

- Indoor
- Accent Lighting
- Signage
- Under Cabinet
- Enclosed Locations
- Backlit Mirrors

Market Segments

- All

SPECIFICATIONS

| | |
|-----------------|-------------------------------|
| Dimensions | See Table |
| Beam Angle | >180° |
| Operating Temp. | -13°F~+122°F |
| Efficacy | 100 LPW |
| Application | Indoor |
| Power Supply | 24V Constant Voltage |
| Warranty | 7-year Manufacturer's Limited |

Color Temperature



3000K



Vapor Tight



EzConnect



Energy Saving



Robust Design



CLEANLIFE® LED



| | |
|-------------|-------|
| Project/Job | Notes |
| Date | |
| Comments | |
| Prepared by | |


Ordering Information

| Part Number | Length (IN) | Power (W) | Input Voltage (V) | Average Rated Life (hrs.) | CCT (±175) | Typical Lumens (lm) (+10%) | CRI (±5) | Lumens Per Watt |
|---------------------------------|-------------|-----------|-------------------|---------------------------|------------|----------------------------|----------|-----------------|
| CL-CTS24SS02HW02JW-22N (85 CRI) | 22 | 6 | 24V DC | L70>50,000 | 3045K | 600 | 85 | 100 |
| CL-CTS24SS02HW02JW-34N (85 CRI) | 34 | 8 | 24V DC | L70>50,000 | 3045K | 800 | 85 | 100 |
| CL-CTS24SS02HW02JW-46N (85 CRI) | 46 | 12 | 24V DC | L70>50,000 | 3045K | 1200 | 85 | 100 |
| CL-CTS24SS02HW02JW-58N (85 CRI) | 58 | 15 | 24V DC | L70>50,000 | 3045K | 1500 | 85 | 100 |

Light Bar Dimensions

| Part Number | (A) Length (in.) |
|---------------------------------|------------------|
| CL-CTS24SS02HW02JW-22N (85 CRI) | 21.5 |
| CL-CTS24SS02HW02JW-34N (85 CRI) | 33.25 |
| CL-CTS24SS02HW02JW-46N (85 CRI) | 45.5 |
| CL-CTS24SS02HW02JW-58N (85 CRI) | 57.5 |

CLEANLIFE® EzConnect™ System
Important Connector Designations



CLEANLIFE ENERGY LLC
1-800-316-2532
support@cleanlifeled.com
www.cleanlifeled.com

CLEANLIFE® and the Pinwheel Mark are registered trademarks of CLEANLIFE® ENERGY LLC. All Rights Reserved. Not to be reproduced or published without prior permission.

PLEASE NOTE: Product specifications are based off of third party test reports and are subject to change without notice.



CLEANLIFE® LED